

All Pages Of This Edition Approved

Signature:




Date:

REV.	DESCRIPTION	REVISER	DATE
A0	First Issue	M	2020-09-01


Front View

Side View


Back View

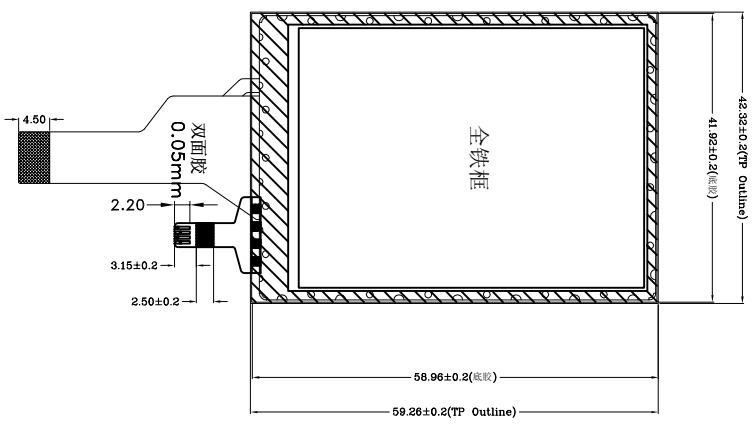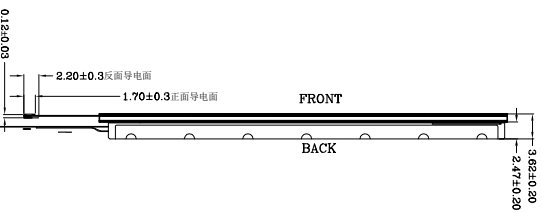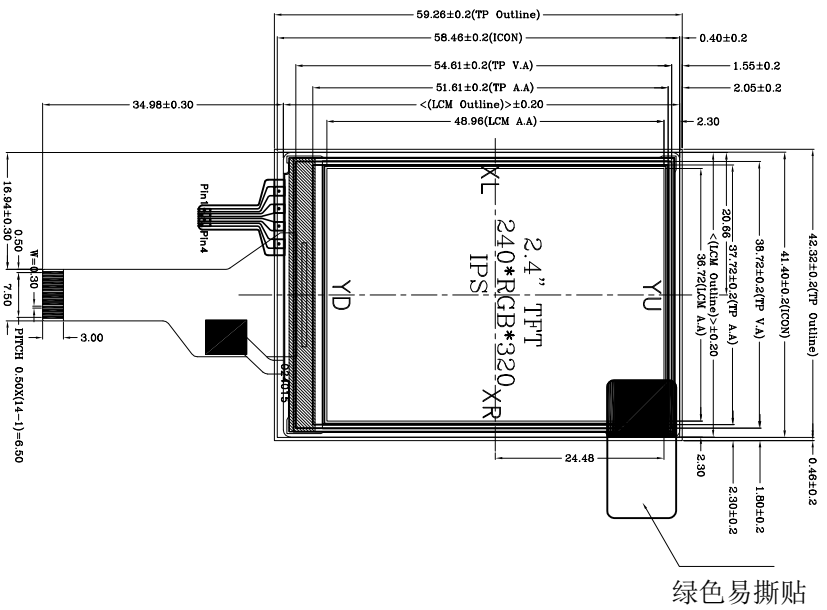

PIN	SYMBOL
1	LED-A
2	LED-K
3	GND
4	VDD-3.3V
5	GND
6	SDO
7	TE
8	SDA
9	WRS
10	SCL
11	CS
12	RESET
13	GND
14	GND



1. VIEWING DIRECTION : ALL
2. POLARIZER MODE : TRANSMISSIVE
3. DRIVER IC : ST7789V3
4. CONNECTOR : /
5. GENERAL TOLERANCE : ±0.2
6. CRITICAL DIMENSION : *
7. REFERENCE DIMENSION : ()
8. OPERATING TEMP : -20°C~+70°C
9. STORAGE TEMP : -30°C~+80°C
10. 图中LCD VA/TP VA为推荐机壳视窗开窗位置，建议机壳开窗位置不要超过LCD VA
11. 未标注公差为正负0.20mm



Shenzhen Hongguang Display Co., LTD

MODEL NUMBER : HG024QV023R01

DATE: 2020-09-01

CHECKED BY: /

DATE: 2020-09-01

勤博普 深圳真格 kepotony 甲